

# Sample Complexity for Topology Estimation in Networks of LTI Systems

Vincent Tan<sup>\*†</sup> and Alan Willsky<sup>†</sup>

Department of Electrical and Computer Engineering,  
University of Wisconsin-Madison<sup>\*</sup>

Department of Electrical Engineering and Computer Science,  
Massachusetts Institute of Technology<sup>†</sup>


IFAC (August 31, 2011)

# Motivation I

- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs


# Motivation I

- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs

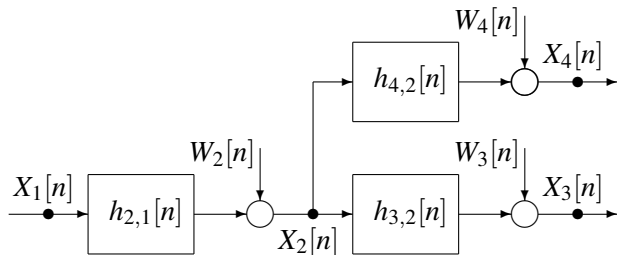


# Motivation I

- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs

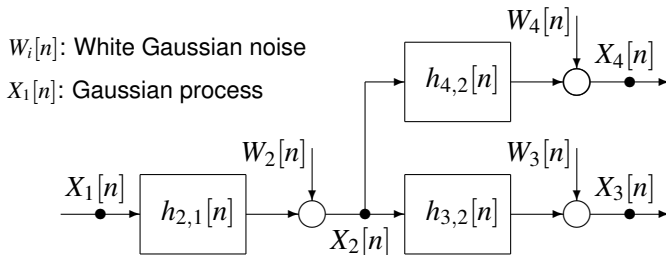

# Motivation I


- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs

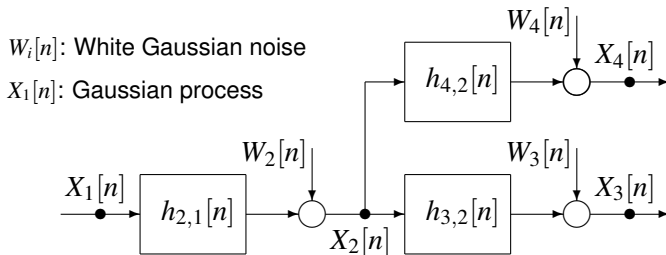


- $p = 4$ ,  $\mathcal{V} = \{1, 2, 3, 4\}$  and  $\mathcal{E} = \{(1, 2), (2, 3), (2, 4)\}$

# Motivation I

- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs

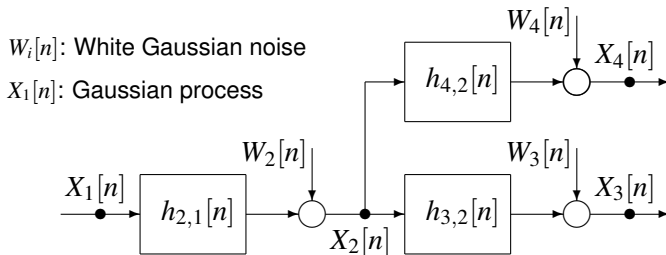


- $p = 4$ ,  $\mathcal{V} = \{1, 2, 3, 4\}$  and  $\mathcal{E} = \{(1, 2), (2, 3), (2, 4)\}$




# Motivation I

- Tree network  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  with  $p$  nodes and  $p - 1$  directed arcs

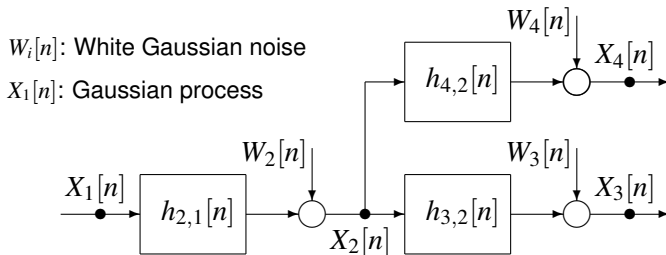


- $p = 4$ ,  $\mathcal{V} = \{1, 2, 3, 4\}$  and  $\mathcal{E} = \{(1, 2), (2, 3), (2, 4)\}$



$$P_{X_1, X_2, X_3, X_4} = P_{X_1} P_{X_2|X_1} P_{X_3|X_2} P_{X_4|X_2}$$


# Motivation II

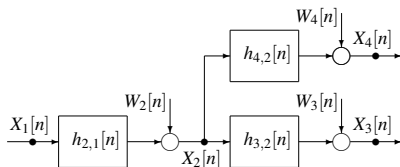

- Observe **discrete-time process**  $X_i := \{X_i[n]\}_{n=0}^{\infty}$  at each node  $i \in \mathcal{V}$




# Motivation II

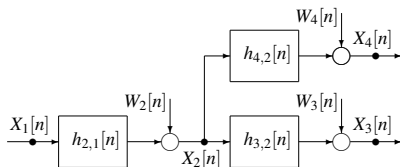


- Observe **discrete-time process**  $X_i := \{X_i[n]\}_{n=0}^{\infty}$  at each node  $i \in \mathcal{V}$
- How long do we need to observe the processes  $(X_1, \dots, X_p)$  in order to get a **good estimate** of the **undirected** tree network  $\mathcal{T}$ ?

# Motivation II

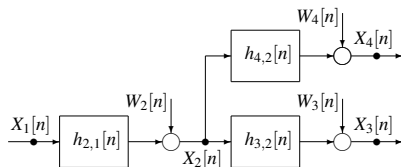


- Observe **discrete-time process**  $X_i := \{X_i[n]\}_{n=0}^{\infty}$  at each node  $i \in \mathcal{V}$
- How long do we need to observe the processes  $(X_1, \dots, X_p)$  in order to get a **good estimate** of the **undirected** tree network  $\mathcal{T}$ ?
- Materassi and Innocenti (TAC-2011) provided an algorithm

# Motivation II

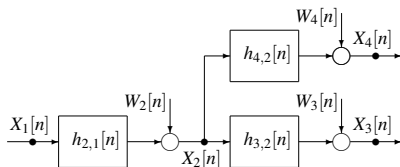

- Observe **discrete-time process**  $X_i := \{X_i[n]\}_{n=0}^{\infty}$  at each node  $i \in \mathcal{V}$
- How long do we need to observe the processes  $(X_1, \dots, X_p)$  in order to get a **good estimate** of the **undirected** tree network  $\mathcal{T}$ ?
- Materassi and Innocenti (TAC-2011) provided an algorithm
- We analyze a related algorithm here

# Motivation II

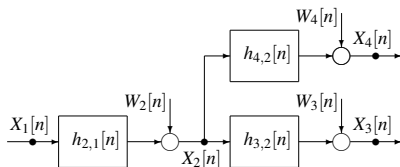

- Observe **discrete-time process**  $X_i := \{X_i[n]\}_{n=0}^{\infty}$  at each node  $i \in \mathcal{V}$
- How long do we need to observe the processes  $(X_1, \dots, X_p)$  in order to get a **good estimate** of the **undirected** tree network  $\mathcal{T}$ ?
- Materassi and Innocenti (TAC-2011) provided an algorithm
- We analyze a related algorithm here
- Many applications in **system identification** and **model selection**

# Relation to Graphical Models


- Intimately related to **graphical models** in machine learning

# Relation to Graphical Models


- Intimately related to **graphical models** in machine learning
- Graph structure  $G = (\mathcal{V}, \mathcal{E})$  represents the joint distribution of a random vector  $(X_1, \dots, X_p)$ :  $\mathcal{V} = \{1, \dots, p\}$  and  $\mathcal{E} \subset \binom{\mathcal{V}}{2}$
- Node  $i \in \mathcal{V}$  corresponds to **random variable/process**  $X_i$ .
- Edge set  $\mathcal{E}$  corresponds to **conditional independencies**.

# Relation to Graphical Models

- Intimately related to **graphical models** in machine learning
- Graph structure  $G = (\mathcal{V}, \mathcal{E})$  represents the joint distribution of a random vector  $(X_1, \dots, X_p)$ :  $\mathcal{V} = \{1, \dots, p\}$  and  $\mathcal{E} \subset \binom{\mathcal{V}}{2}$
- Node  $i \in \mathcal{V}$  corresponds to **random variable/process**  $X_i$ .
- Edge set  $\mathcal{E}$  corresponds to **conditional independencies**.




$$X_i \perp\!\!\!\perp \mathbf{X}_{V \setminus \{\text{nbnd}(i) \cup i\}} \mid \mathbf{X}_{\text{nbnd}(i)}$$



$$\mathbf{X}_A \perp\!\!\!\perp \mathbf{X}_B \mid \mathbf{X}_S$$

# Relation to Graphical Models

- Intimately related to **graphical models** in machine learning
- Graph structure  $G = (\mathcal{V}, \mathcal{E})$  represents the joint distribution of a random vector  $(X_1, \dots, X_p)$ :  $\mathcal{V} = \{1, \dots, p\}$  and  $\mathcal{E} \subset \binom{\mathcal{V}}{2}$
- Node  $i \in \mathcal{V}$  corresponds to **random variable/process**  $X_i$ .
- Edge set  $\mathcal{E}$  corresponds to **conditional independencies**.

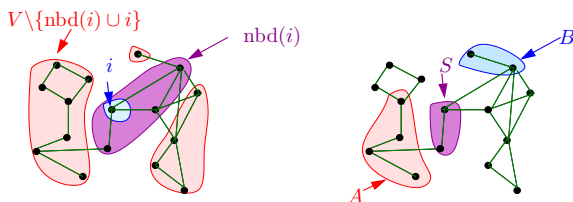


$$X_i \perp\!\!\!\perp \mathbf{X}_{V \setminus \{nbd(i) \cup i\}} \mid \mathbf{X}_{nbd(i)}$$

$$\mathbf{X}_A \perp\!\!\!\perp \mathbf{X}_B \mid \mathbf{X}_S$$

- Kalman filter, hidden Markov models, Bayesian networks...




# Tree-Structured Graphical Models



$$\begin{aligned} P(\mathbf{x}) &= \prod_{i \in \mathcal{V}} P_i(x_i) \prod_{(i,j) \in \mathcal{E}} \frac{P_{ij}(x_i, x_j)}{P_i(x_i)P_j(x_j)} \\ &= P_1(x_1) \frac{P_{1,2}(x_1, x_2)}{P_1(x_1)} \frac{P_{1,3}(x_1, x_3)}{P_1(x_1)} \frac{P_{1,4}(x_1, x_4)}{P_1(x_1)} \end{aligned}$$


# Tree-Structured Graphical Models



$$\begin{aligned} P(\mathbf{x}) &= \prod_{i \in \mathcal{V}} P_i(x_i) \prod_{(i,j) \in \mathcal{E}} \frac{P_{ij}(x_i, x_j)}{P_i(x_i) P_j(x_j)} \\ &= P_1(x_1) \frac{P_{1,2}(x_1, x_2)}{P_1(x_1)} \frac{P_{1,3}(x_1, x_3)}{P_1(x_1)} \frac{P_{1,4}(x_1, x_4)}{P_1(x_1)} \end{aligned}$$

For trees, **directed** model is equal to the **undirected** model

# Tree-Structured Graphical Models




$$\begin{aligned} P(\mathbf{x}) &= \prod_{i \in \mathcal{V}} P_i(x_i) \prod_{(i,j) \in \mathcal{E}} \frac{P_{ij}(x_i, x_j)}{P_i(x_i) P_j(x_j)} \\ &= P_1(x_1) \frac{P_{1,2}(x_1, x_2)}{P_1(x_1)} \frac{P_{1,3}(x_1, x_3)}{P_1(x_1)} \frac{P_{1,4}(x_1, x_4)}{P_1(x_1)} \end{aligned}$$

For trees, **directed** model is equal to the **undirected** model

**Tree-structured Graphical Models:** Tractable Learning and Inference

# Tree-Structured Graphical Models




$$\begin{aligned} P(\mathbf{x}) &= \prod_{i \in \mathcal{V}} P_i(x_i) \prod_{(i,j) \in \mathcal{E}} \frac{P_{ij}(x_i, x_j)}{P_i(x_i) P_j(x_j)} \\ &= P_1(x_1) \frac{P_{1,2}(x_1, x_2)}{P_1(x_1)} \frac{P_{1,3}(x_1, x_3)}{P_1(x_1)} \frac{P_{1,4}(x_1, x_4)}{P_1(x_1)} \end{aligned}$$

For trees, **directed** model is equal to the **undirected** model

## Tree-structured Graphical Models: Tractable Learning and Inference

- Maximum-Likelihood learning of tree structure is tractable
  - **Chow-Liu** Algorithm (1968)

# Tree-Structured Graphical Models




$$\begin{aligned} P(\mathbf{x}) &= \prod_{i \in \mathcal{V}} P_i(x_i) \prod_{(i,j) \in \mathcal{E}} \frac{P_{ij}(x_i, x_j)}{P_i(x_i) P_j(x_j)} \\ &= P_1(x_1) \frac{P_{1,2}(x_1, x_2)}{P_1(x_1)} \frac{P_{1,3}(x_1, x_3)}{P_1(x_1)} \frac{P_{1,4}(x_1, x_4)}{P_1(x_1)} \end{aligned}$$

For trees, **directed** model is equal to the **undirected** model

## Tree-structured Graphical Models: Tractable Learning and Inference

- Maximum-Likelihood learning of tree structure is tractable
  - **Chow-Liu** Algorithm (1968)
- Inference on Trees is tractable
  - **Sum-Product** Algorithm (Pearl 1988)


# Main Result/Contribution

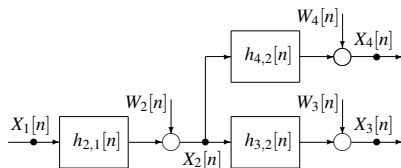

Let us observe the  $p$  Gaussian WSS processes for  $N$  time steps

$$\{X_1[n]\}_{n=0}^{N-1}, \{X_2[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$$

# Main Result/Contribution

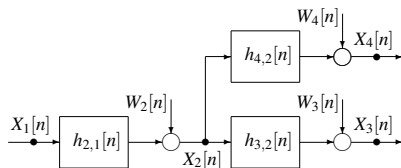


Let us observe the  $p$  Gaussian WSS processes for  $N$  time steps

$$\{X_1[n]\}_{n=0}^{N-1}, \{X_2[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$$

## Theorem

Let  $\varepsilon > 0$ . If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

# Main Result/Contribution

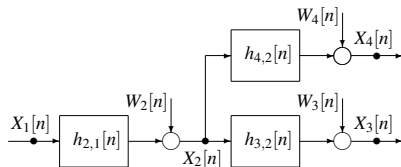

Let us observe the  $p$  Gaussian WSS processes for  $N$  time steps

$$\{X_1[n]\}_{n=0}^{N-1}, \{X_2[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$$


## Theorem

Let  $\varepsilon > 0$ . If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

$$N = O\left(\log^{1+\varepsilon}\left(\frac{P}{\delta^{1/3}}\right)\right),$$



# Main Result/Contribution

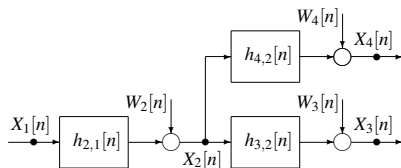

Let us observe the  $p$  Gaussian WSS processes for  $N$  time steps

$$\{X_1[n]\}_{n=0}^{N-1}, \{X_2[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$$

## Theorem

Let  $\varepsilon > 0$ . If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

$$N = O\left(\log^{1+\varepsilon}\left(\frac{P}{\delta^{1/3}}\right)\right), \quad \text{then} \quad \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) < \delta$$

# Learning Procedure I

- Given observations  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , learn  $\mathcal{T}$ , a **tree**

# Learning Procedure I

- Given observations  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , learn  $\mathcal{T}$ , a **tree**
- $\mathcal{M}_{\text{Tree}}$ : Set of probability measures associated to **tree** processes

# Learning Procedure I

- Given observations  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , learn  $\mathcal{T}$ , a **tree**
- $\mathcal{M}_{\text{Tree}}$ : Set of probability measures associated to **tree** processes
- Consider the problem

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu), \quad D(\mu \parallel \nu) := \int \log \frac{d\mu}{d\nu} d\nu$$


where  $\mu$  is an **estimate** of the probability measure of  $(X_1, \dots, X_p)$

# Learning Procedure I

- Given observations  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , learn  $\mathcal{T}$ , a **tree**
- $\mathcal{M}_{\text{Tree}}$ : Set of probability measures associated to **tree** processes
- Consider the problem

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu), \quad D(\mu \parallel \nu) := \int \log \frac{d\mu}{d\nu} d\nu$$

where  $\mu$  is an **estimate** of the probability measure of  $(X_1, \dots, X_p)$

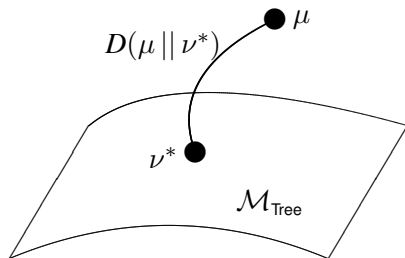

# Learning Procedure II

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu)$$

# Learning Procedure II

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu)$$

## Lemma (Chow-Liu for processes)

*The measure that achieves the minimum is Markov on  $\mathcal{T}^*$  given by*

$$\mathcal{T}^* = \arg \max_{\mathcal{T} \in \text{Tree}} \sum_{(i,j) \in \mathcal{T}} I_{\mu}(X_i; X_j),$$

# Learning Procedure II

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu)$$

## Lemma (Chow-Liu for processes)

The measure that achieves the minimum is Markov on  $\mathcal{T}^*$  given by

$$\mathcal{T}^* = \arg \max_{\mathcal{T} \in \text{Tree}} \sum_{(i,j) \in \mathcal{T}} I_{\mu}(X_i; X_j),$$

- The problem is a a **max-weight spanning tree** problem



# Learning Procedure II

$$\inf_{\nu \in \mathcal{M}_{\text{Tree}}} D(\mu \parallel \nu)$$

## Lemma (Chow-Liu for processes)

The measure that achieves the minimum is Markov on  $\mathcal{T}^*$  given by



$$\mathcal{T}^* = \arg \max_{\mathcal{T} \in \text{Tree}} \sum_{(i,j) \in \mathcal{T}} I_{\mu}(X_i; X_j),$$

- The problem is a **max-weight spanning tree** problem
- The **mutual information rate** for Gaussian processes is


$$I(X_i; X_j) := -\frac{1}{4\pi} \int_0^{2\pi} \log(1 - |\gamma_{i,j}(\omega)|^2) d\omega$$

- $\gamma_{i,j}(\omega)$  is the **coherence function** between  $X_i$  and  $X_j$


# Learning Procedure III




# Learning Procedure III




True MI rates  $\{I(X_i; X_j)\}$



Estimated MI rates  $\{\hat{I}(X_i; X_j)\}$



True tree  $\mathcal{T}$





Estimated tree  $\mathcal{T}^* \neq \mathcal{T}$

# Problem Statement

- Error event is  $\{\hat{\mathcal{T}}_N \neq \mathcal{T}\}$


# Problem Statement

- Error event is  $\{\hat{\mathcal{T}}_N \neq \mathcal{T}\}$



# Problem Statement

- Error event is  $\{\hat{\mathcal{T}}_N \neq \mathcal{T}\}$

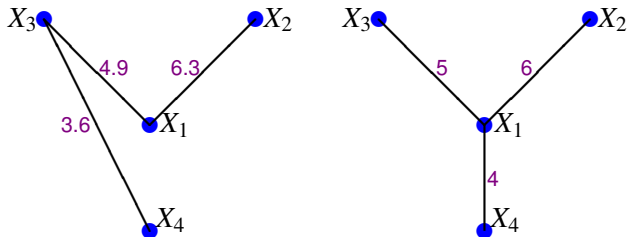


- Bound the error probability

$$\mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T})$$

# Problem Statement

- Error event is  $\{\hat{\mathcal{T}}_N \neq \mathcal{T}\}$

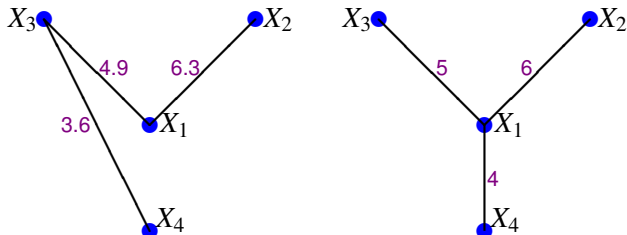


- Bound the error probability

$$\mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T})$$

- How do errors occur?

# Problem Statement

- Error event is  $\{\hat{\mathcal{T}}_N \neq \mathcal{T}\}$

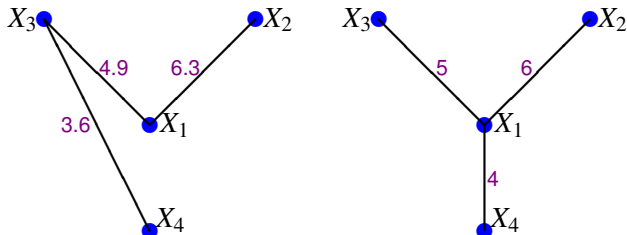

- Bound the error probability

$$\mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T})$$


- How do errors occur?
- The **order** of the estimated MI rates relative to the true ones is important



# Order of MI Rates

## Correct Structure

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.2 | 5.6 | 4.5 | 2.8 | 2.2 | 1.1 |





# Order of MI Rates

## Correct Structure

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.2 | 5.6 | 4.5 | 2.8 | 2.2 | 1.1 |

## Incorrect Structure!


|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.3 | 4.9 | 3.5 | 3.6 | 2.2 | 1.1 |



# Order of MI Rates


## Correct Structure

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.2 | 5.6 | 4.5 | 2.8 | 2.2 | 1.1 |




## Incorrect Structure!

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.3 | 4.9 | 3.5 | 3.6 | 2.2 | 1.1 |



## Structure Unaffected


|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 5.5 | 5.6 | 4.5 | 3.0 | 2.2 | 1.1 |



# Order of MI Rates


## Correct Structure

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.2 | 5.6 | 4.5 | 2.8 | 2.2 | 1.1 |




## Incorrect Structure!

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 6.3 | 4.9 | 3.5 | 3.6 | 2.2 | 1.1 |



## Structure Unaffected

|                     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|
| $I(X_i; X_j)$       | 6   | 5   | 4   | 3   | 2   | 1   |
| $\hat{I}(X_i; X_j)$ | 5.5 | 5.6 | 4.5 | 3.0 | 2.2 | 1.1 |




Estimate mutual information rates and ensure  $\hat{I}(X_i; X_j) \approx I(X_i; X_j)$

# Estimating the Mutual Information Rates I

- Given  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , estimate  $\{I(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$  using **Bartlett's** procedure


# Estimating the Mutual Information Rates I

- Given  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , estimate  $\{I(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$  using **Bartlett's** procedure
- Divide** each length- $N$  realization  $\{X_j[n]\}_{n=0}^{N-1}$  into  $L$  **non-overlapping** segments of length  $M$  such that  $LM \approx N$

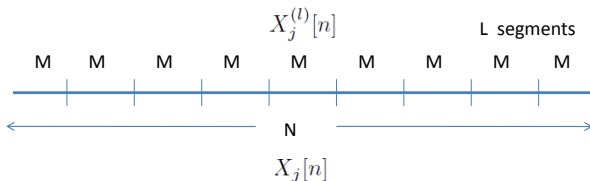

# Estimating the Mutual Information Rates I

- Given  $\{X_1[n]\}_{n=0}^{N-1}, \dots, \{X_p[n]\}_{n=0}^{N-1}$ , estimate  $\{I(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$  using **Bartlett's** procedure
- Divide** each length- $N$  realization  $\{X_j[n]\}_{n=0}^{N-1}$  into  $L$  **non-overlapping** segments of length  $M$  such that  $LM \approx N$

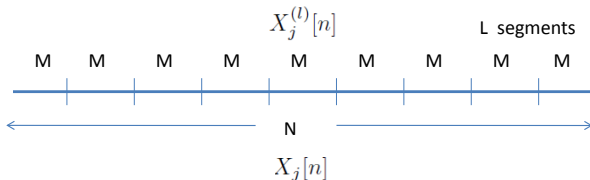

- Compute the length- $M$  **discrete Fourier transform** for each signal segment, i.e.,  $\tilde{X}_j^{(l)}[k] = \mathcal{F}(X_j^{(l)}[n])$

# Estimating the Mutual Information Rates II

- Estimate the **time-averaged periodograms** using Bartlett's averaging procedure on the  $L$  signal segments, i.e.,

$$\hat{\Phi}_{X_i}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left| \tilde{X}_i^{(l)}[k] \right|^2$$

$$\hat{\Phi}_{X_i, X_j}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left( \tilde{X}_i^{(l)}[k] \right)^* \tilde{X}_j^{(l)}[k]$$



# Estimating the Mutual Information Rates II

- Estimate the **time-averaged periodograms** using Bartlett's averaging procedure on the  $L$  signal segments, i.e.,

$$\hat{\Phi}_{X_i}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left| \tilde{X}_i^{(l)}[k] \right|^2$$

$$\hat{\Phi}_{X_i, X_j}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left( \tilde{X}_i^{(l)}[k] \right)^* \tilde{X}_j^{(l)}[k]$$

- Estimate the **magnitude-squared coherences**:

$$|\hat{\gamma}_{i,j}[k]|^2 := \frac{|\hat{\Phi}_{X_i, X_j}[k]|^2}{\hat{\Phi}_{X_i}[k] \hat{\Phi}_{X_j}[k]}.$$

# Estimating the Mutual Information Rates II

- Estimate the **time-averaged periodograms** using Bartlett's averaging procedure on the  $L$  signal segments, i.e.,

$$\hat{\Phi}_{X_i}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left| \tilde{X}_i^{(l)}[k] \right|^2$$

$$\hat{\Phi}_{X_i, X_j}[k] := \frac{1}{L} \sum_{l=0}^{L-1} \left( \tilde{X}_i^{(l)}[k] \right)^* \tilde{X}_j^{(l)}[k]$$

- Estimate the **magnitude-squared coherences**:

$$|\hat{\gamma}_{i,j}[k]|^2 := \frac{|\hat{\Phi}_{X_i, X_j}[k]|^2}{\hat{\Phi}_{X_i}[k] \hat{\Phi}_{X_j}[k]}.$$

- Estimate the MI rates by using the **Riemann sum**:

$$\hat{I}(X_i; X_j) := -\frac{1}{2M} \sum_{k=0}^{M-1} \log \left( 1 - |\hat{\gamma}_{i,j}[k]|^2 \right).$$

# Estimating the Tree

- With the estimated  $\{\hat{I}(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$ , we run a **max-weight spanning tree** procedure to learn  $\hat{\mathcal{T}}$

# Estimating the Tree

- With the estimated  $\{\hat{I}(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$ , we run a **max-weight spanning tree** procedure to learn  $\hat{\mathcal{T}}$
- This procedure is efficient

$$O(p^2(N \log M + \log p)).$$

# Estimating the Tree

- With the estimated  $\{\hat{I}(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$ , we run a **max-weight spanning tree** procedure to learn  $\hat{\mathcal{T}}$
- This procedure is efficient

$$O(p^2(N \log M + \log p)).$$

- But not clear how to tradeoff between **number of signal segments**  $L$  and **length of each segment**  $M$

# Estimating the Tree

- With the estimated  $\{\hat{I}(X_i; X_j)\}_{(i,j) \in \mathcal{V}}$ , we run a **max-weight spanning tree** procedure to learn  $\hat{\mathcal{T}}$
- This procedure is efficient

$$O(p^2(N \log M + \log p)).$$

- But not clear how to tradeoff between **number of signal segments**  $L$  and **length of each segment**  $M$
- For convenience, we let  $M = M_L$  be a function of  $L$

## Lemma (Concentration of MI Rate)

*If the number of DFT points  $M_L$  satisfies*

$$\lim_{L \rightarrow \infty} M_L = \infty, \quad \lim_{L \rightarrow \infty} L^{-1} \log M_L = 0,$$

## Lemma (Concentration of MI Rate)

If the number of DFT points  $M_L$  satisfies

$$\lim_{L \rightarrow \infty} M_L = \infty, \quad \lim_{L \rightarrow \infty} L^{-1} \log M_L = 0,$$

then for any  $\eta > 0$ , we have

$$\mathbb{P}(|\hat{I} - I| > \eta) \leq \exp \left[ -(L-1) \min_{\omega \in [0, 2\pi)} \varphi(\gamma(\omega); \eta) \right]$$



# Concentration of MI Rate

## Lemma (Concentration of MI Rate)

If the number of DFT points  $M_L$  satisfies

$$\lim_{L \rightarrow \infty} M_L = \infty, \quad \lim_{L \rightarrow \infty} L^{-1} \log M_L = 0,$$

then for any  $\eta > 0$ , we have

$$\mathbb{P}(|\hat{I} - I| > \eta) \leq \exp \left[ -(L-1) \min_{\omega \in [0, 2\pi)} \varphi(\gamma(\omega); \eta) \right]$$

We can choose  $M = \lceil L^\varepsilon \rceil, \varepsilon > 0$  to satisfy above condition

# Bounding the Overall Error Probability I


# Bounding the Overall Error Probability I

Recall that the optimization for the **tree structure** is


$$\mathcal{T}^* = \arg \max_{\mathcal{T} \in \text{Tree}} \sum_{(i,j) \in \mathcal{T}} \hat{I}(X_i; X_j),$$

where  $\hat{I}(X_i; X_j)$  are the estimated mutual information rates


# Bounding the Overall Error Probability II

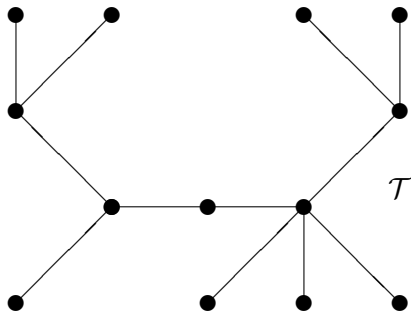


# Bounding the Overall Error Probability II

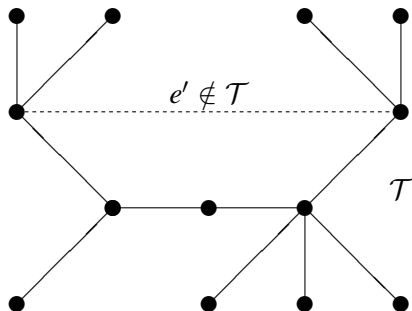


# Bounding the Overall Error Probability II

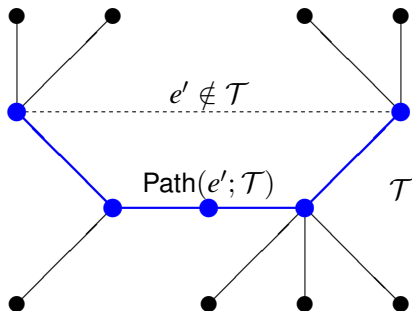

# Bounding the Overall Error Probability II

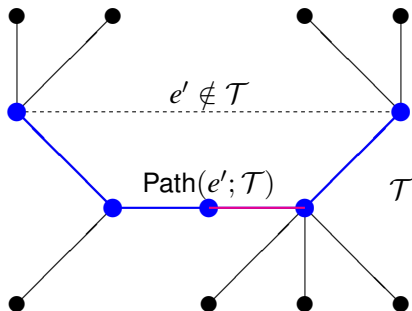


# Bounding the Overall Error Probability II

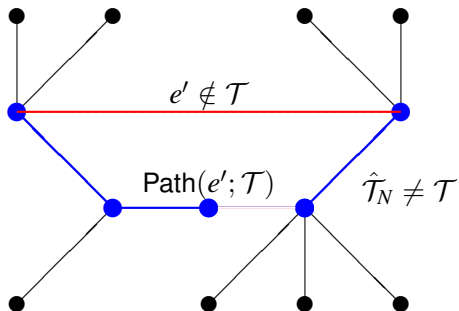



# Bounding the Overall Error Probability II

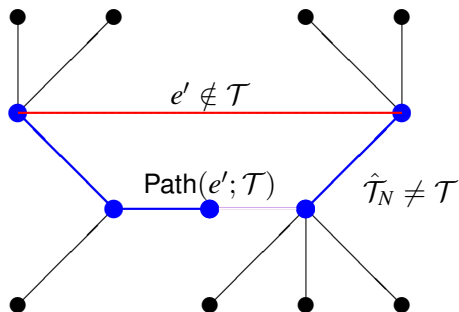

## Lemma

$$\{\hat{\mathcal{T}}_N \neq \mathcal{T}\} = \bigcup_{(k,l) \notin \mathcal{E}} \bigcup_{(i,j) \in \text{Path}(k,l)} \{\hat{I}(X_k; X_l) \geq \hat{I}(X_i; X_j)\}$$

Possible to bound  $\mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T})$  by using the **union bound**

## Theorem

If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

## Theorem

If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

$$N = O(\log^{1+\varepsilon} p),$$

## Theorem

If  $\mathcal{T}$  is a tree and *mutual information rates* on the edges are uniformly bounded away from zero, and if

$$N = O(\log^{1+\varepsilon} p), \quad \text{then} \quad \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) \rightarrow 0$$

# Conclusion

- We have proposed a framework for learning networks comprising **dynamical systems** and **stochastic processes**

# Conclusion

- We have proposed a framework for learning networks comprising **dynamical systems** and **stochastic processes**
- We showed that if observation time  $N$  is almost **logarithmic** in the number of nodes  $p$ ,

$$\lim_{N \rightarrow \infty} \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) = 0$$

# Conclusion

- We have proposed a framework for learning networks comprising **dynamical systems** and **stochastic processes**
- We showed that if observation time  $N$  is almost **logarithmic** in the number of nodes  $p$ ,

$$\lim_{N \rightarrow \infty} \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) = 0$$

- Future work I: Is  $N = O(\log^{1+\varepsilon}(\frac{p}{\delta^{1/3}}))$  optimal?

# Conclusion

- We have proposed a framework for learning networks comprising **dynamical systems** and **stochastic processes**
- We showed that if observation time  $N$  is almost **logarithmic** in the number of nodes  $p$ ,

$$\lim_{N \rightarrow \infty} \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) = 0$$

- Future work I: Is  $N = O(\log^{1+\varepsilon}(\frac{p}{\delta^{1/3}}))$  optimal?
- Future work II: Estimate **directed** tree



# Conclusion

- We have proposed a framework for learning networks comprising **dynamical systems** and **stochastic processes**
- We showed that if observation time  $N$  is almost **logarithmic** in the number of nodes  $p$ ,

$$\lim_{N \rightarrow \infty} \mathbb{P}(\hat{\mathcal{T}}_N \neq \mathcal{T}) = 0$$

- Future work I: Is  $N = O(\log^{1+\varepsilon}(\frac{p}{\delta^{1/3}}))$  optimal?
- Future work II: Estimate **directed** tree